



# Package Details

## TLM832 Case



### Mechanical Drawing

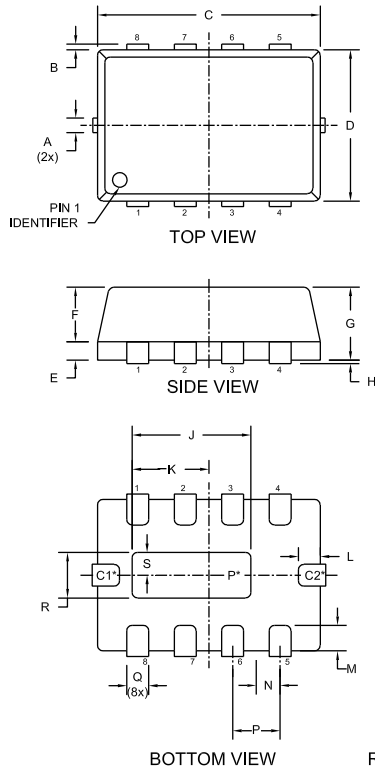

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.007	0.012	0.170	0.300
B	-	0.005	-	0.125
C	0.114	0.122	2.900	3.100
D	0.075	0.083	1.900	2.100
E	0.006	0.010	0.150	0.250
F	0.026	0.030	0.650	0.750
G	0.031	0.039	0.800	1.000
H	0.000	0.002	0.000	0.050
J	0.059	0.067	1.500	1.700
K	0.036	0.044	0.910	1.110
L	0.008	0.018	0.200	0.450
M	0.008	0.018	0.200	0.450
N	0.013		0.325	
P	0.026		0.650	
Q	0.009	0.013	0.240	0.340
R	0.017	0.025	0.430	0.630
S	0.006	0.014	0.160	0.360

TLM832 (REV: R2)

**Part Marking:**  
2-3 Character Alpha/Numeric Code


**Lead Code:**  
Reference individual device datasheet.

**\* Note:**

- Exposed pad P internally connected to pins 1, 2, 3, 6, 7, 8
- Exposed metallized connection C1 internally connected to pins 1, 2, 3, 6, 7, 8
- Exposed metallized connection C2 internally connected to pin 5

### Mounting Pad Geometry

(Dimensions in mm)

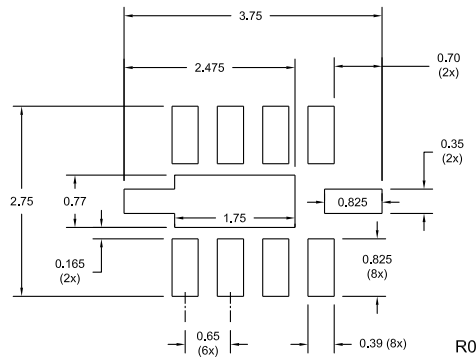


R1 (4-March 2010)

# Package Details

## TLM832 Case



### Tape Dimensions and Orientation (Dimensions in mm)

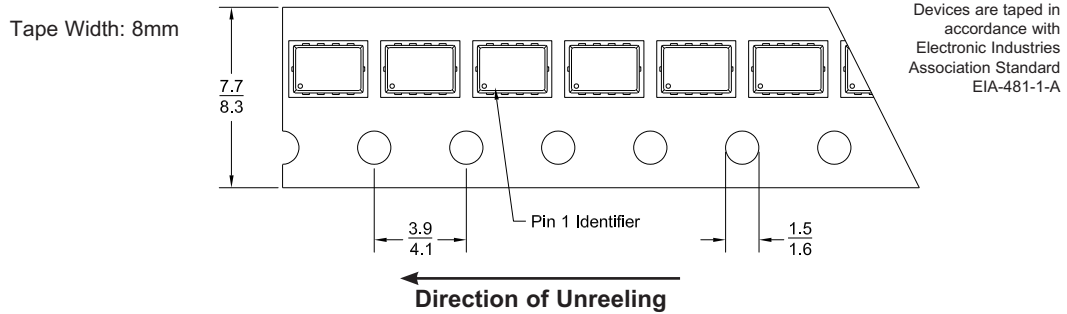

### Packaging Base

7" Reel = 3,000 pcs.

### Reel Labeling Information

**Each reel is labeled with the following information:**

Central Part Number, Customer Part Number, Purchase Order Number, Quantity, Lot Number, Date Code, Ship Date and Marking Code.

### Reel Packing Information

Reel Size	Reels per Box (Maximum)	Parts per Box (Maximum)	Box Dimensions		Shipping Weight (Max.)	
			INCH	CM	LB	KG
7"	9	27,000	9x9x5	23x23x13	4	2
	17	51,000	9x9x9	23x23x23	7	4
	40	120,000	21x9x9	53x23x23	14	7
	108	324,000	27x9x17	69x23x43	39	18

### Ordering Information

- For devices taped and reeled on 7" reels, add TR suffix to part number.
- All SMDs are available in small quantities for prototype and manual placement applications.

R1 (4-March 2010)